

Bevel Gear Boxes Model 25 – REFERENCE SHEETS



Other Models Available. For Instant Data, see www.vonruden.com.



12.03.04



- Lightweight, High Strength, Cast Aluminum Housing.
- Weight = 9 lbs. (approx.)
- Oil Capacity = 8 oz. (approx.)

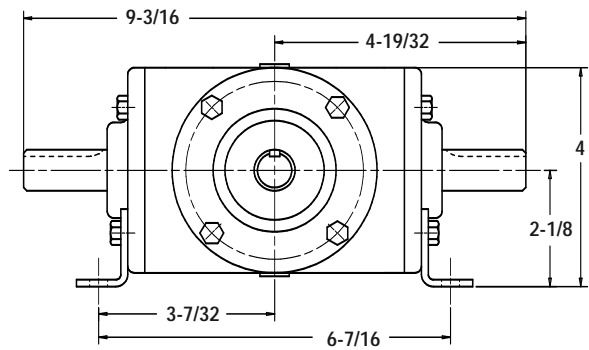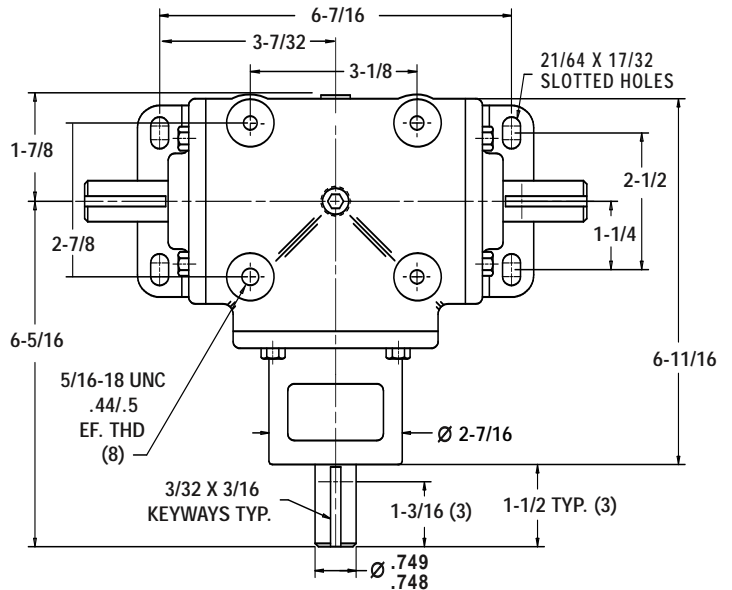

Model 25-144 Shown Above

CROSS SHAFT

All Types 1:2 Ratio Only	All Other Types and Ratios
.625/.624" Dia	.749/.748" Dia.

KEYWAYS

3/16 x 3/32"
1-3/16" Full Depth

SHAFT ARRANGEMENT AND ROTATION

MODEL NUMBERS		Type A	Type B	Type C	Type D	Type E	Type G
Gear Type	Gear Ratio						
Straight Cut	1:1 Reduction	25-00	25-03	25-06	25-09	25-12	25-16
	1.5:1 Reduction	25-01	25-04	25-07	25-10	25-13	25-17
	2:1 Reduction	25-68	25-69	25-70	25-71	25-72	25-74
Straight Cut	1:1.5 Speed Up	25-02	25-05	25-08	25-11	25-14	25-18
	1:2 Speed Up	25-126	25-127	25-130	25-131	25-115	25-132
Spiral	1:1 Reduction	25-138	25-139	25-140	25-141	25-142	25-144

Bevel Gear Boxes Model 25 – REFERENCE SHEETS

Other Models Available. For Instant Data, see www.vonruden.com.



12.03.04

Gear Type & Ratio		MAXIMUM HORSEPOWER RATINGS (1.0 SERVICE FACTOR)									
		Input RPM									
		10	100	300	500	700	1000	1200	1750	2500	3000
Straight Cut 1:1 Reduction	Gear Strength	.10	1.2	3.7	6.2	8.7	12.5	15.0	21.9	**	**
	1000 hr. L ₁₀	*	*	*	*	*	*	*	21.2	**	**
	5000 hr. L ₁₀	*	*	*	5.4	6.9	8.8	10.1	13.1	**	**
Straight Cut 1.5:1 Reduction	Gear Strength	.10	.80	2.6	4.3	6.0	8.5	10.2	15.0	21.3	25.6
	1000 hr. L ₁₀	*	*	*	*	*	*	*	14.7	19.0	21.5
	5000 hr. L ₁₀	*	*	*	3.8	4.8	6.2	7.0	9.1	11.7	13.3
Straight Cut 2:1 Reduction	Gear Strength	.10	.50	1.4	2.4	3.4	4.8	5.8	8.5	12.1	14.6
	1000 hr. L ₁₀	*	*	*	*	*	*	*	*	*	*
	5000 hr. L ₁₀	*	*	*	*	*	*	5.4	7.1	9.0	10.3
Straight Cut 1:1.5 Speed Up	Gear Strength	.10	1.0	3.2	5.3	7.5	10.7	12.8	18.7	**	**
	1000 hr. L ₁₀	*	*	*	*	*	*	*	*	**	**
	5000 hr. L ₁₀	*	*	*	5.2	6.6	8.4	9.6	12.5	**	**
Straight Cut 1:2 Speed Up	Gear Strength	.10	.70	2.2	3.7	5.2	7.4	8.9	13.0	**	**
	1000 hr. L ₁₀	*	*	*	*	*	*	*	*	**	**
	5000 hr. L ₁₀	*	*	*	*	*	*	*	12.2	**	**
Spiral 1:1 Reduction	Gear Strength	.10	1.2	3.6	6.0	8.4	12.0	14.4	20.3	30.0	36.0
	1000 hr. L ₁₀	*	*	*	5.3	6.8	8.7	10.0	13.1	16.7	19.0
	5000 hr. L ₁₀	*	1.1	2.3	3.3	4.2	5.4	6.2	8.1	10.3	11.7

* Use gear strength ratings only.

** Pitch line velocity is too fast for proper gear lubrication depending on duty cycle.

See rating explanation on Page 5.

See important installation and lubrication information on Page 6.

***For a detailed performance & cost comparison
of Forged, Straight Cut, and Spiral gears,
see page 4 of these reference sheets.***

Bevel Gear Boxes Model 25 – REFERENCE SHEETS

Other Models Available. For Instant Data, see www.vonruden.com.




12.03.04

Cross Reference Information:

Drawing dimensions shown here should be used for initial comparison only. Use dimensions on a model-specific drawing once initial comparisons have been made. In addition to dimensions, other issues must be considered when comparing gear boxes.

These issues include:

- HP, torque and speed ratings
- Rotational direction of each shaft
- Lubrication fittings (if any)
- Drain port and breather locations
- Beveled gear type (forged, spiral, etc.)

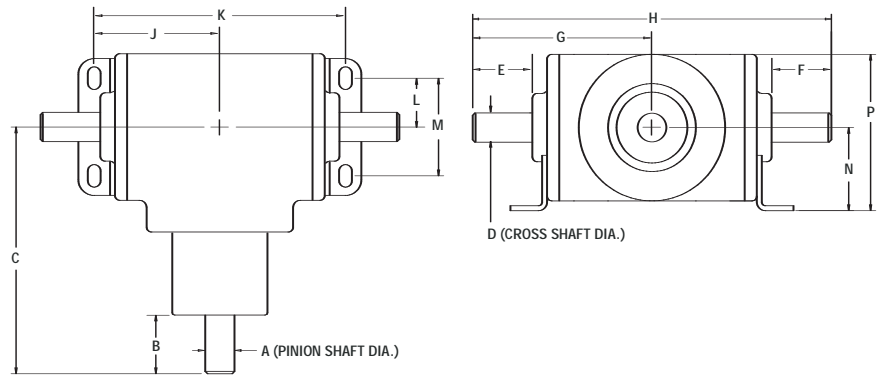

Important: Bevel gear boxes are often made with “special” modifications. This is especially true with shaft lengths and diameters. Always measure the actual dimensions on the box you are replacing.

CROSS REFERENCE CHART (1:1 only)

Manufacturer	Model	SHAFT DIAMETERS AND LENGTHS								CASE DIMENSIONS					
		A	B	C	D	E*	F*	G	H	J	K	L	M	N	P
Von Ruden	25	0.725	1.500	6.312	0.750	1.500	1.500	4.593	9.187	3.218	6.437	1.250	2.500	2.125	4.000
Von Ruden	2725	0.750	1.937	6.313	0.750	1.938	1.938	4.954	9.188	3.219	6.469	1.250	2.500	2.125	3.938
Von Ruden	2711	1.000	1.750	6.125	1.000	1.968	1.969	4.609	9.219	3.297	6.469	1.125	2.250	2.563	4.375
Hub City	11	1.000	1.750	6.125	1.000	#	#	4.671	9.218	3.171	6.468	1.125	2.250	2.562	4.625

*Dimensions E and F are to end caps.



No dimension given in catalog.

Bevel Gear Boxes Model 25 – REFERENCE SHEETS

Other Models Available. For Instant Data, see www.vonruden.com.



12.03.04




Gear Types

	Precision Forged	Straight Cut	Spiral
Horsepower	Highest. Forging process yields stronger metal grain structure. Also, forged gears can be designed with a web connecting the heel of teeth for increased strength.	Lower than forged.	Higher than straight cut. More teeth in continuous contact and increased tooth beam strength. But the thrust load imposed by spiral gears reduces bearing life.
Speed	Same as straight cut.	Same as forged.	Highest, due to better lubrication and contact.
Noise Level	Good	Improved over forged.	Best, more continuous tooth contact.
Cost/Gear (once tooled)	Relatively Low.	Moderate But set-up costs greatly influence price, especially in quantities less than 100.	Highest due to the extra machining required. Also, set-up costs influence cost significantly, especially in quantities less than 100.
Tooling Cost	Very high. Plus long lead time for tooling (months).	Low. Primarily a gear cutter.	Low. Primarily a gear cutter.
Economical Production Lot Size	High (1000s).	Low. But cost is influenced significantly by set-up, especially for less than 100.	Low. But cost is influenced significantly by set-up, especially for less than 100.

Backlash


Our Standard backlash is 0.004" minimum and 0.012" to 0.015" maximum. Other backlash can be provided on a special order basis.

We shim our gear boxes for consistent backlash using the process described below.

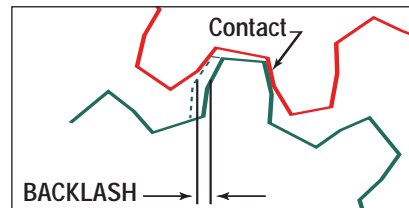


Backlash = The shortest distance between the non-contacting surfaces of adjacent gear teeth.


Shimming Procedure



STEP 1
Shim bearings on cross shaft to acceptable end play of .003" to .001"



STEP 2
Shim pinion housing to achieve proper backlash and gear tooth contact

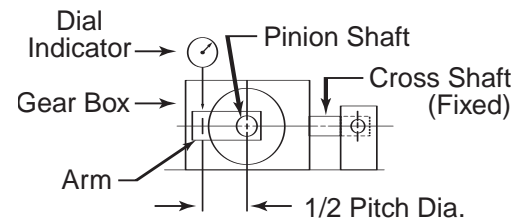

STEP 3
Measure backlash

Bevel Gear Boxes Model 25 – REFERENCE SHEETS

Other Models Available. For Instant Data, see www.vonruden.com.



12.03.04

Gear Box Ratings

Our strength and durability ratings are based on AGMA suggested guidelines, engineering calculations and our own actual experience. They should be used only as an initial selection guide.

We cannot guarantee that these ratings will prove satisfactory for all applications. Complete suitability can be determined only through prototyping and field testing.

AGMA Ratings

AGMA Ratings apply to gear material, heat treatment, design, tooth finish, tooth profile, and allowable tolerances.

Our straight cut and spiral gears are manufactured to AGMA Class 9 with forged gears manufactured to AGMA Class 7. Other AGMA classes can be provided.

Class of Service

Our ratings are based on AGMA Class 1 service conditions. A 1.00 service factor is used when the application is free from recurrent shock loading and is continuous but does not exceed 10 hours per day. For other operating conditions, the rated horsepower can be increased or decreased by dividing the rated horsepower by the proper service factor from this table.

Prime Mover	Duration of Service	DRIVEN MACHINE LOAD CLASSIFICATIONS		
		Uniform	Moderate Shock	Heavy Shock
Electric Motor	Occasional .5 hr/day	..0.50	..0.80	..1.25
	Intermittent 3 hrs/day	..0.80	..1.00	..1.50
	Up to 10 hrs/day	...1.00	..1.25	..1.75
	24 hrs per day1.25	..1.50	..2.00
Multi-Cylinder Internal Combustion Engine	Occasional .5 hr/day	..0.80	..1.00	..1.50
	Intermittent 3 hrs/day	..1.00	..1.25	..1.75
	Up to 10 hrs/day	...1.25	..1.50	..2.00
Single Cylinder Internal Combustion Engine	Occasional .5 hr/day	..1.00	..1.25	..1.75
	Intermittent 3 hrs/day	..1.25	..1.50	..2.00
	Up to 10 hrs/day	...1.50	..1.75	..2.25
	24 hrs/day1.75	..2.00	..2.50

Our Catalog Rating System

RPM	→	700
<hr/>		
HP based on gear strength	→	57.5
<hr/>		
HP based on 1000 hours L ₁₀ bearing life	→	41.6
<hr/>		
HP based on 5000 hours L ₁₀ bearing life	→	25.7
<hr/>		

Bearing Life Ratings

Our bearing life ratings are based on the L₁₀ life calculations which are an expression of reliability. There is a 90% reliability (100% less 10%) that the bearing life will equal or exceed the calculated hours listed.

We tabulate bearing ratings for both 1000 and 5000 hours of L₁₀ life.

Our calculations assume no externally applied thrust or radial loads. Bearing life can be calculated when external loads are applied, but our engineers need to know the location and direction of the external load as well as its magnitude. Use our application data sheet (DT176) when forwarding information.

Torque Ratings

Horsepower ratings are provided in these reference section. To determine torque, use this calculation.

$$T = 63.025 \frac{HP}{N}$$

T = Torque (Lb.-inches)
HP = Horsepower
N = RPM

Starting Torque

Momentary or starting torque should be limited to 200% of gear strength rated capacity.

Maximum Speeds

The maximum speeds listed in our catalog can be exceeded in some applications. Consult factory.

Bevel Gear Boxes Model 25 – REFERENCE SHEETS

Other Models Available. For Instant Data, see www.vonruden.com.



12.03.04

Thermal Capacity

The thermal capacity of a gear box (Its ability to dissipate heat) may be somewhat less than the mechanical horsepower ratings included in this documentation. The thermal capacity is dependent on load conditions (duty cycle) and cooling air circulation.

Additional cooling or a larger gear box may be required if the continuous operating temperature exceeds 200°F.

Prototype testing is recommended.

Lubrication Specifications

All Standard Bevel Boxes are splash lubricated and splash cooled. Shafts must be mounted horizontally (+/-15°). When shafts are mounted vertically, an external grease fitting may be required. Please specify when ordering.

The input speed rating must not exceed the gear box's specification. Maximum continuous operating temperature for standard units is 180° F (82° C). The maximum intermittent operating temperature should not exceed 225° F (107° C) with a rest period at least five times the running period. (Consult Factory on applications with operating parameters exceeding these requirements).

- All standard bevel boxes are **shipped without lubrication**. Box must be filled at least to the oil check plug before operating.
- The oil level should be established according to the gearbox's speed and mounting position.
- Boxes running below 500 RPM require a slightly higher oil level. In very low RPM applications the oil may be replaced with grease (Consult Factory).
- Overheating can be caused by too little or too much oil in the box.
- Use ISO VG150 EP antifoaming oil for normal operations. Use ISO VG100EP or ISO VG150EP antifoaming oil for high RPM applications.
- Fill, check and drain plugs are located for applications where all shafts are in a horizontal position, unless otherwise specified.
- Breather and drain plug positions meet most mounting requirements, however end users are responsible for relocating the breather and drain plugs to meet Von Ruden's specifications.
- Special units equipped with grease fittings should be serviced regularly with a multi-purpose NLGI Grade No. 2 grease.

Approximate Oil Capacities

Models	15	25	27	33	40	90	93	110	113
Ounces (oz.)	4	8	6	16	16	24	32	56	80
Liters (L)	.1	.2	.15	.5	.5	.7	.9	1.7	2.4

Recommended Lubricants

Ambient Temp.	Lubricant
-20° to 0° F	SAE 10W or 10W-40 Automotive Oil
0° to 40° F	SAE 80 Gear Oil with Anti-Foaming Agent
40° to 100° F	SAE 90 Gear Oil with Anti-Foaming Agent
100° to 150° F	SAE 140 Gear Oil with Anti-foaming Agent

Lubrication Change Intervals

The lubricant in a new gear box should be changed after 100 hours of operation or four (4) weeks by draining at operating temperature, thoroughly cleaning with a flushing oil to remove any particles, and refilling with clean oil. Thereafter, under normal operating conditions, the lubricant should be changed every 2500 hours of operation or every six (6) months.

Under severe operating conditions such as dust or rapid temperature changes, the lubricant should be changed more frequently.

Note

Von Ruden reminds users of these products that their safe operation depends on use in compliance with engineering information provided by Von Ruden Manufacturing. Users are also reminded that safe operation depends on proper installation, operation, and routine maintenance and inspection under prevailing conditions. It is the responsibility of users (and not Von Ruden) to provide and install guards or safety devices which may be required by recognized safety standards or by the Occupational Safety and health Act of 1970 and its subsequent provisions.